

DS-KV8413-WME1(C)/Flush Video Intercom Villa Door Station

HIKVISION



Key Feature

- Support Wifi, convenient setting up and no wiring required
- Support web configuration
- Aluminum alloy, nice industry design, IP65, IK08, 3 indicator integrated
- Internal Mifare card reader, 4-ch Indoor station access control
- Noise suppression and echo cancellation
- 2MP HD camera with IR supplement
- Standard PoE/12 VDC

Specification

| System parameters | |
|--------------------|---|
| Operating system | Embedded Linux operation system |
| ROM | 32 M |
| RAM | 256 M |
| CPU | Embedded MCU Processor |
| Display parameters | |
| Screen size | / |
| Operation method | / |
| Type | / |
| Resolution | / |
| Video parameters | |
| Lens | 1 |
| Resolution | Main stream : 1920 × 1080 Sub stream : 640 × 480 |
| FOV | Horizontal: 124° Vertical: 75° |

| WDR | Support |
|----------------------------|---|
| Supplement light | IR supplement |
| Video compression standard | H.264 |
| Audio parameters | |
| Audio compression standard | G.711 U, G.711 A |
| Audio input | Built-in omnidirectional microphone |
| Audio output | Built-in loudspeaker (more than 80 dB within 30 cm) |
| Audio compression bitrate | 64 Kbps |
| Audio quality | Noise suppression and echo cancellation |
| Volume adjustment | Adjustable |
| Capacity | |
| User capacity | 2000 |
| Card capacity | 10000 |
| Network parameters | |
| Communication protocol | TCP/IP, RTSP |
| Wired network | 10/100 Mbps self-adaptive Ethernet |
| Wi-Fi standard | Wi-Fi 802.11 b/g/n |
| Bluetooth version | / |
| 3G/4G standard | / |

| | |
|-----------------------|--|
| Received frequency | 2.4 to 2.4835GHz |
| Transmitted frequency | 2.4 to 2.4835 GHz |
| Bandwidth | 20/40 MHz |
| Frequency power | 802.11b:15 dBm +/- 1.5 dBm 802.11g:15 dBm +/- 1.5 dBm 802.11n(ht20):14 dBm +/- 1.5 dBm 802.11n(ht40):12 dBm +/- 1.5 dBm |

| Authentication | |
|------------------------|-----------|
| Card reading frequency | 13.56 MHz |

| Device interfaces | |
|--------------------|--------------|
| Alarm input | 4 |
| Network interface | 1 |
| TAMPER | 1 |
| Exit button | 2 Max. |
| RS-485 | 1 |
| USB | 0 |
| Wiegand | 0 |
| TF card | 1 (reserved) |
| Alarm output | 0 |
| Lock control | 2 |
| Door contact input | 2 |
| Power interface | 1 |


| General | |
|-------------------------|----------------------------------|
| Button | 4 |
| Installation | Flush mounting |
| Indicator | 3 |
| Weight | 380 g |
| Protective level | IP65, IK08 |
| Working temperature | -40°C to 53°C (-40°F to 127.4°F) |
| Working humidity | 10% to 95% |
| Dimensions | 174 mm × 91 mm × 29 mm |
| Battery | / |
| Application environment | Outdoor |
| Power consumption | < 10 W |

| | |
|----------|---|
| Language | English, French, Portuguese, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Slovak |
|----------|---|

Available Model

DS-KV8413-WME1(C)/Flush

Dimension

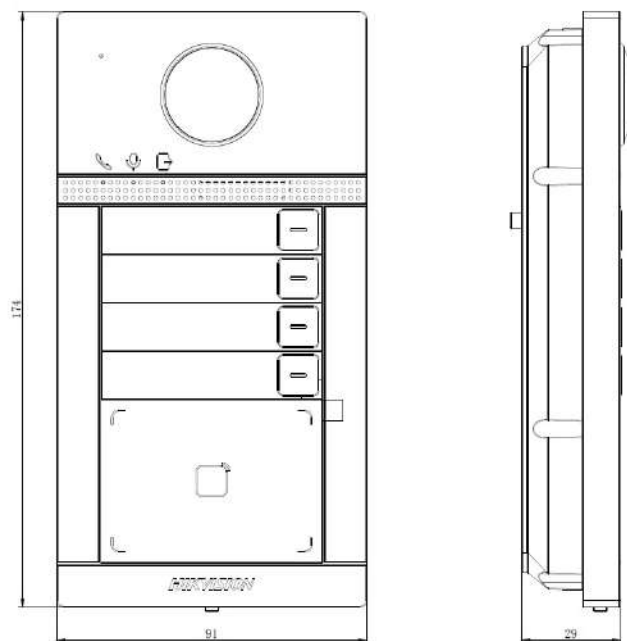

Unit: mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

