


4MP Compact Wi-Fi & PoE Camera

DH-C4K-P



Series Overview

The Cube Series, which is under the Dahua Wireless series, are cameras that are not only easy to install and operate, but also perform outstandingly and are cost-effective. They capture sharp, detailed images of scenes in high definition and offer powerful functions including AI human detection, privacy mode, and two-way talk. Information is synchronously sent to your phone to keep you up-to-date. These cameras are widely used in small and medium-sized settings such as small-sized retail stores.

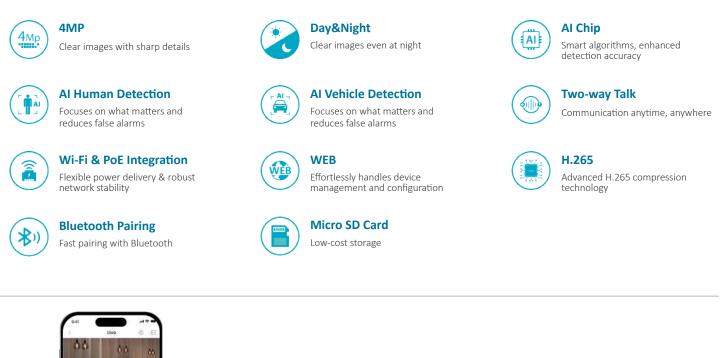

00	T	00 711		20	
۵ (E	0	-		ць Ць	
S Playback	0	0	66	88	
	0	6		÷	
	è				
Alarm Mooaage			0	1.~	
07/06/2023					
< ::::::::::::::::::::::::::::::::::::	action		1		
< St Humanitiet	ection		1	1	
• E vehicle Det	ectors		1		
CT. Vetschercon		_		1	

Upgrade Your Experience with DMSS

Dahua Mobile Security Surveillance (DMSS) is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.







Specifications

Camera

Video Bit Rate

Motion Detection

(○) × 1

What's in the box

Tools:

Map×1

Bracket×1

Installation Position

Screw Package×1

Image Rotation

Day/Night

WDR

Camera		Built-in MIC	Yes, built-in Mic	
Image Sensor	1/3" CMOS	Built-in Speaker	Yes, built-in speaker	
Max. Resolution	2560 (H) × 1440 (V)	Audio Compression	PCM; G.711a; G.711Mu	
Illumination Distance	Up to 30 m (98.43 ft) (IR)	Network		
Illuminator Number	1 (IR LED)	Network Port	RJ-45 (10/100 Base-T)	
Angle Adjustment	Pan: 0° to 360° Tilt:-10° to 100°	Wi-Fi	IEEE 802.11b/g/n/ax 2.412–2.472 GHz, 2.4 G	
Lens Type	Fixed-focal	Wi-Fi Pairing	Bluetooth pairing	
Focal Length	2.8 mm; 3.6 mm	Storage	Micro SD card (support max. 256 GB)	
Max. Aperture	F2.0	Management Software	Smart PSS Lite;DMSS	
Field of View	2.8 mm: H: 92°; V: 50°; D: 107° 3.6 mm: H: 75°; V: 41°; D: 88°	Mobile Client	iOS;Android	
Intelligence		Function		
Human Detection	Yes	Abnormal Sound Alarm	Yes	
Audio and Video		General		
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)	Certifications	CE	
		Power Supply	12 VDC/PoE	
Video Frame Rate	Main stream: 2560 × 1440@(1-25/30 fps) Sub stream: 640 × 360@(1-25/30 fps) *The values above are the max. frame rates of each	Power Consumption	Basic: 2.04 W (12 VDC); 4.7 W (PoE) Max.: 2.89 W (12 VDC); 5.85 W (PoE)	
	stream; for multiple streams, the values will be subjected to the total encoding capacity.	Operating Temperature	-10 °C to +45 °C (+14 °F to +113 °F)	
Video Pit Pata H.264: 24 kbps–6144 kbps		Operating Humidity	≤95% (RH), non-condensing	

Camera Button

Casing Material

Net Weight

Product Dimensions

H.264: 24 kbps–6144 kbps H.265: 9 kbps–6144 kbps

Yes OFF/ON (4 areas, rectangular) 0°/180°

Auto(ICR)/Color/B/W

Power:

QR Code×1 Quick Start Guide×1 Legal and Regulation Information×1

Documents:

Power Adapter×1



64 mm × 100 mm × 34 mm (2.52" × 3.94" × 1.34") (L × W × H)

Reset button

0.11 kg (0.24 lb)

Plastic